


# STIEBEL ELTRON

INSTALLATION REQUIREMENTS AS  
PER A.S. 3500.4.2

ELECTRICAL CONNECTION  
3 PHASE – 415V HARD WIRED  
19.4 kW  
27 AMPS PER PHASE

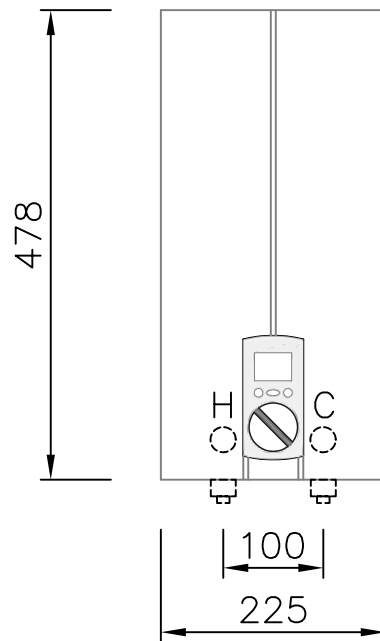


FRONT ELEVATION

1/2 INCH FEMALE  
CONNECTIONS FOR INTERIOR  
WALL OR 1/2 INCH MALE  
FOR EXPOSED LOWER  
CONNECTIONS

INCOMING WATER  
SUPPLY 20mm

GATE VALVE OR  
FULL FLOW VALVE  
(max. 1000 Kpa)  
(BY OTHERS)

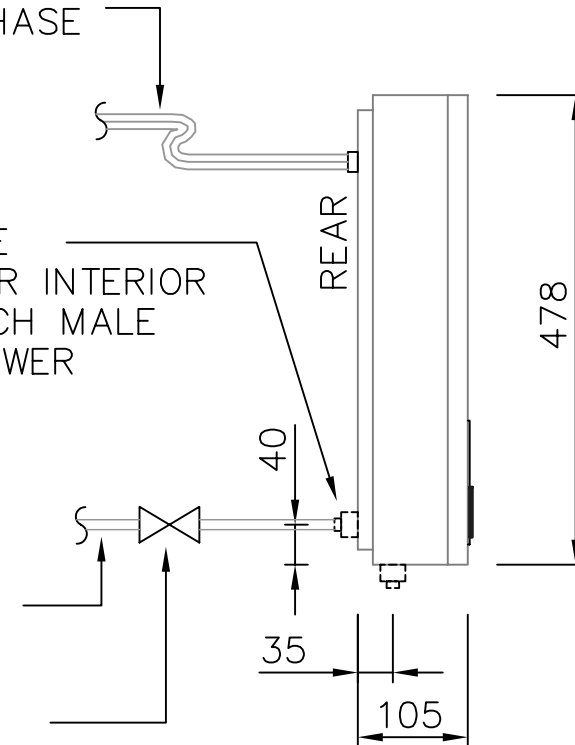

SIDE ELEVATION

## NOTE:

IF MAXIMUM 50°C WATER IS REQUIRED, THE  
USE OF A HIGH PERFORMANCE TEMPERING  
VALVE IS RECOMMENDED. (BY OTHERS)

## DHE18